

# Elwin - 6" LED Recessed Downlight

Series No: CG-DL06-25



- ◎ Minimal heat generation & high efficacy power transformer
- ◎ 35,000hours
- ◎ Excellent photometric performance
- ◎ Perfect Replacement alternative for 2 x 26 PLC downlight
- ◎ Emergency battery back up available



Our Job Reference: 香港中文大學中醫專科診所暨臨床教研中心

**OSRAM**  
Opto Semiconductors

The CG-DL06-25 LED recessed downlight is perfect choice for both new & replacement of PLC downlight


#### Features:

- Die-cast aluminium housing
- LED: SMD type
- External Gear Box
- High performance optical firm diffuser
- High CRI (>80)
- High Power Factor (>0.9)
- Energy Efficiency
- Long lifetime
- **IP54 available**
- TRIAC/0-10v Dimmable available

#### Standards:

- IEC/EN 60598-1, IEC/EN 60598-2-2
- IEC/EN 55015, IEC/EN 61547
- IEC/EN 61000-3-2, IEC/EN 61000-3-3
- RoHS compliant

#### Dimension:

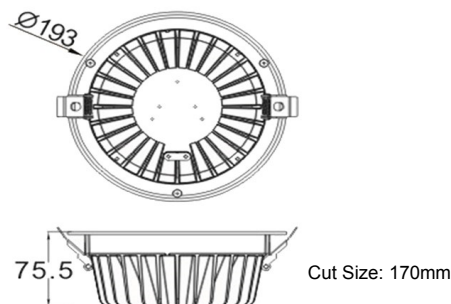

<b>Model:</b>	<b>CG-DL06-25W</b>		
<b>Rated Power:</b>	<b>25W</b>		
<b>Voltage:</b>	200-240V AC 50/60Hz		
<b>Color Temp:</b>	<b>3000k</b>	<b>4000k</b>	<b>5000k</b>
<b>Lumen Output</b>	1900lm	1950lm	2050lm
<b>Beam Angle:</b>	90°		
<b>Dimension:</b>	Ø193mm x 75.5mm		
<b>Cut-out:</b>	Ø170mm		
<b>Operation Temp:</b>	-10 ~ 40°C		
<b>CRI:</b>	> 80		
<b>Dimming Options:</b>	TD = TRIAC Dimming AD = 0 - 10v Dimming		
<b>Emergency Battery Kit</b>	<b>2hrs Ni-Cd Battery w/external Power Gear Box</b> <b>Model No.: WT400(LED)</b> <b>PGB Dimension: L430 x W150 x H50mm</b>		
<b>Life time:</b>	35,000hours		