

Elwin - LED Linear Bar

Series No: HC-L3535/5050



The HC-L13535/5050 LED Linear Bar is an affordable alternative for fluorescent lamp, which provides high illumination in slim & compact design for use of general lighting and energy-saving solution

Features:



- 6063 Aluminium Housing + PC Cover
- High CRI (>80 or 90)
- High Power Factor (>0.9)
- Energy Efficiency
- Long lifetime (35,000hrs)

Standards:

- IEC/EN 60598-1,
- IEC/EN 60598-2-2
- IEC/EN 55015, IEC/EN 61547
- IEC/EN 61000-3-2,
- IEC/EN 61000-3-3
- RoHS compliant

- ◎ Slim, Compact Design
- ◎ 35,000hours Lifetime
- ◎ Excellent photometric performance
- ◎ Low Maintenance Cost
- ◎ 0 - 10v Dimmable available

Dimension:

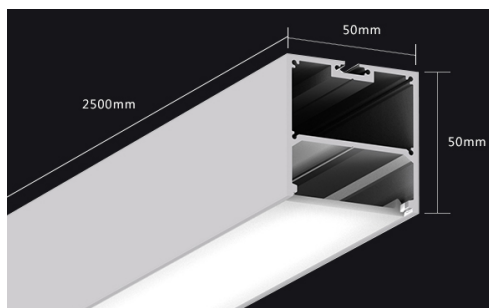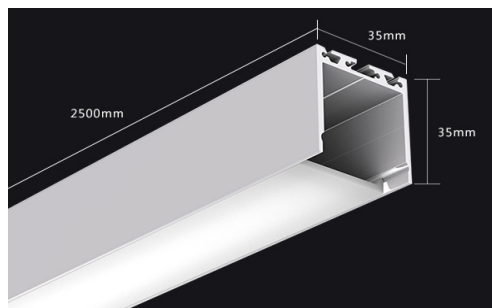

Model:	HC-L3535 / 5050L/C		
LED:	2835 size (60pcs)		2835 size (120pcs)
Rated Power:	14.4w		28.8w
Voltage:	200-240V AC 50/60Hz <0.9A		
Beam Angle:	140°		
Color Temp:	3000k	4000k	6000k
Lumen Output	(14.4w) 1200	(14.4w) 1350	(14.4w) 1600
	(28.8w) 1600	(28.8w) 2000	(28.8w) 2200
Dimenison:	L2000 x W35 x H35mm L2000 x W35 x H35mm		
Operation Temp:	-10 ~ 40℃		
CRI:	> 80 or >90		
Dimming Options:	0 - 10v Dimming		
Life time:	35,000hours		
Accessories	Ceiling Mounted Steel Wire + Fix Nut		