

Elwin - 6" LED Surface Mounted Downlight


Series No: GG-SDL06 series



(Job reference: TVB City - Press Room)

- ◎ Minimal heat generation & high efficacy power transformer
- ◎ 35,000hours
- ◎ Excellent photometric performance
- ◎ Perfect Replacement alternative for **PLC Downlight**

Lighting Distribution :

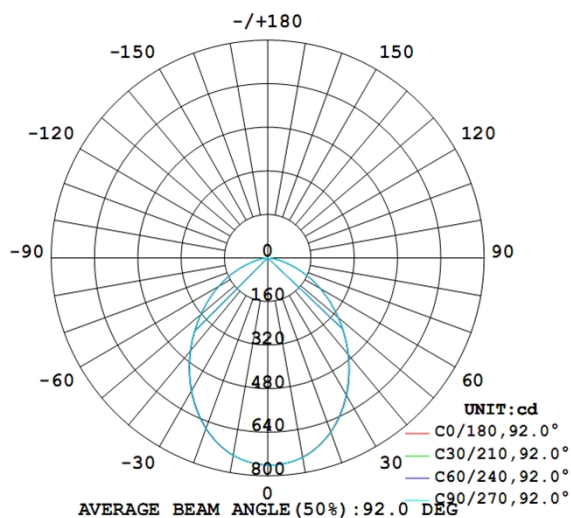

OSRAM
Opto Semiconductors

The GG-DL06-15 LED Surface-mounted Downlight are perfect choice for both new & replacement of PLC downlight


Features:

- Die-cast aluminium housing
- High performance optical firm diffuser
- High CRI (>80)
- High Power Factor (>0.9)
- Low THD Distortion
- Energy Efficiency
- Long lifetime

Standards:

- IEC/EN 60598-1, IEC/EN 60598-2-2
- IEC/EN 55015, IEC/EN 61547
- IEC/EN 61000-3-2, IEC/EN 61000-3-3
- RoHS compliant

Dimension:



Ø195mm



H = 160mm

Model:	GG-SDL06 Series		
Nominal Power:	15W		25W
Voltage:	200-240V AC 50/60Hz		
Color Temp:	3000k	4000k	5000k
Lumen Output	1100/1900lm	1200/2000lm	1300/2100lm
Beam Angle:	90°		
Dimension:	Ø195mm x 160mm		
Dimming Options:	TRIAC/0 - 10v Dimmable available		
Operation Temp:	-10 ~ 40°C		
CRI:	> 80		
Emergency Battery Kit	2hrs/3hrs Ni-Cd Battery w/white Power Gear Box		
Life time:	35,000hours		