

Elwin - 6" LED Slim Surface Downlight

Series No: BN-SDL06-08/12



The BN-SDL06-08/12 LED Surface Downlight is perfect choice for both new for PLC downlight

Features:


- Die-cast aluminium housing
- High performance optical firm diffuser
- High CRI (>80)
- High Power Factor (>0.9)
- Energy Efficiency
- Long lifetime
- TRIAC Dimmable available

Standards:


- IEC/EN 60598-1, IEC/EN 60598-2-2
- IEC/EN 55015, IEC/EN 61547
- IEC/EN 61000-3-2, IEC/EN 61000-3-3
- RoHS compliant

- ◎ Minimal heat generation & high efficacy power transformer
- ◎ 35,000hours Life time
- ◎ Excellent photometric performance
- ◎ Perfect Replacement alternative for **1 x 13w PLC**
- ◎ Emergency battery back up available

Lighting Distribution :

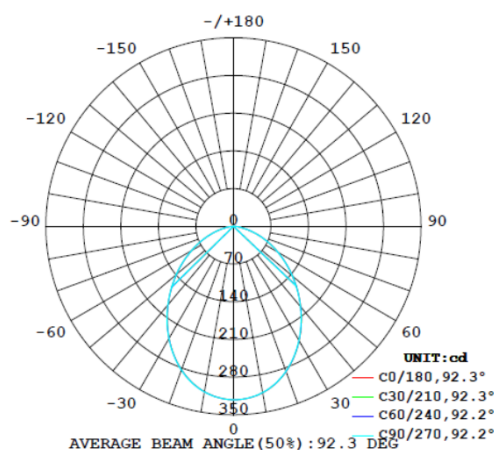

Dimension:

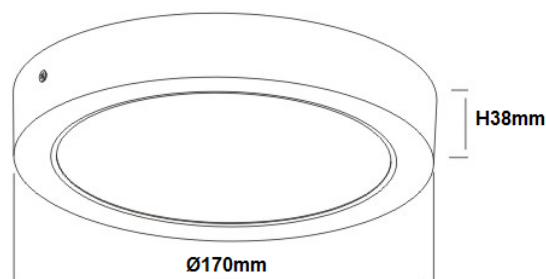

Model:	GG-SDL06-08/12 series		
Rated Power:	8w	12w	
Voltage:	200-240V AC	50/60Hz	
Color Temp:	3000k	4000k	5000k
Lumen Output	480lm / 700lm	510lm / 750lm	530lm / 800lm
Beam Angle:	110°		
Dimension:	Ø170mm x 38mm (excluding PSU)		
Housing Color:	White (W/H) or Black (B/K)		
Operation Temp:	-10 ~ 40°C		
CRI:	> 80		
Dimming Options:	TD = TRIAC Dimming		
Life time:	35,000hours		