

Elwin - 6" LED Slim Recessed Downlight


Series No: BN-DL06-08/12



Our Job Reference:
樓上集團 - 黃大仙店



Lighting Distribution :

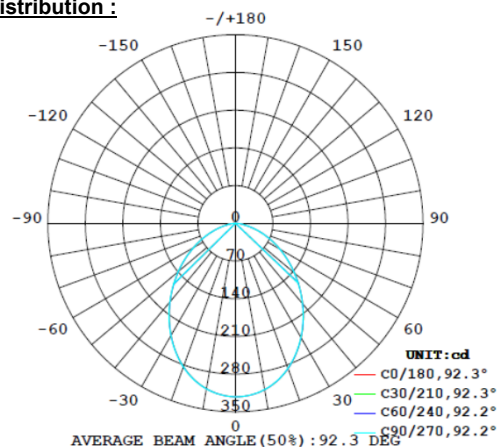

The BN-DL06-08/12 LED Recess-mounted Downlight are perfect choice for both new & replacement for PLC downlight


Features:

- Die-cast aluminum housing
- High performance optical firm diffuser
- LED: 2835 size LED 0.2w x 60pcs
- High CRI (>80)
- High PF (>0.9) & Efficiency (>80%)
- Energy Efficiency
- Long lifetime
- 0-10v Dimmable

Standards:

- IEC/EN 60598-1, IEC/EN 60598-2-2
- IEC/EN 55015, IEC/EN 61547
- IEC/EN 61000-3-2, IEC/EN 61000-3-3
- RoHS compliant

Dimension:

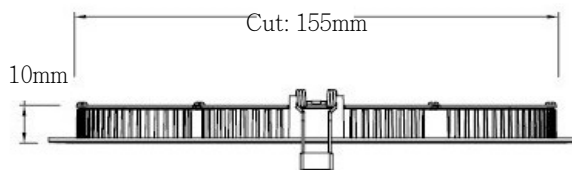

Model:	GG-DL06-08/12 series		
Rated Power:	8w	12w	
Voltage:	200-240V AC	50/60Hz	
Color Temp:	3000k	4000k	5000k
Lumen Output	480lm / 700lm	510lm / 750lm	530lm / 800lm
Beam Angle:	110°		
Dimenison:	Ø170mm x 10mm (excluding PSU)		
Cut-out:	Ø155mm		
Operation Temp:	-10 ~ 40°C		
CRI:	> 80		
Dimming Options:	TD = TRIAC Dimming		
Life time:	30,000hours		