



CP02

Dimensions:

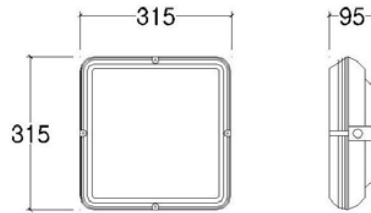

Light Distribution:

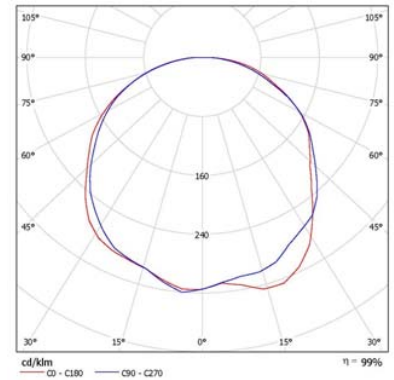

Features:

- ⊙ Virtually Unbreakable clear prismatic polycarbonate diffuser
- ⊙ Die cast aluminium body
- ⊙ Stainless Steel bolts
- ⊙ Surface mounted
- ⊙ Glow wire test: 850°C
- ⊙ Microwave Sensor (Energy saved over 50%)
- ⊙ 2 hours emergency battery

Applications:

- ⊙ Pedestrian subways
- ⊙ Circulation areas
- ⊙ Local authority buildings
- ⊙ Public conveniences
- ⊙ Public areas in parks
- ⊙ Markets
- ⊙ Security lighting applications
- ⊙ Staircase

Standard:

- ⊙ IEC / EN60598-1
- ⊙ IEC / EN60598-2-1
- ⊙ IEC / EN60598-2-22



Microwave Sensor

Detection Angel: 360°
Reach: 1-8m(radii.)
Starting time: approx 1 sec
Time Setting: 8s - 12min
Power consumption: ~ 0.9W Lumen: 200-2000lm




LED data

Beam Angel: 120°
CRI: 75
Efficacy: 100lm / W
Color range:
2700-3500K / 4000-5500K / 5700-6500K

Structure of LED

Ordering Example:

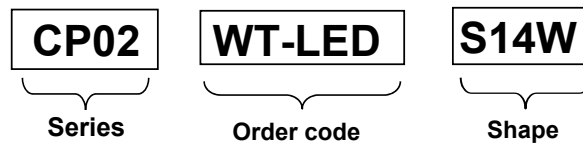

Series	Order Code	Shape	Stand-by Wattage	Occupied mode Wattage	Option
CP02	WT-LED-	S14W	4W - LED	14W - LED	F - Fuse terminal block WG - Wire Guard SWG - Stainless Wire Guard E - Emergency Battery MS - Microwave Sensor

Note: All dimensions can be tailor-made upon request.