

Elwin - 8" LED Surface Mounted Downlight


Series No.: EW-SDL08



(Job reference: 東華三院 - 天晴社區綜合服務大樓)

- ◎ Minimal heat generation & high efficacy power transformer
- ◎ 35,000 hrs lifetime
- ◎ Excellent photometric performance
- ◎ Perfect Replacement alternative for PLC Downlight

Lighting Distribution : 10w 3000k

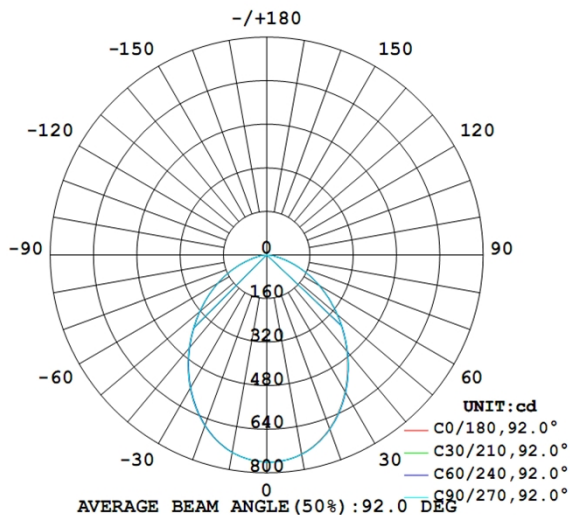

OSRAM
Opto Semiconductors

The EC-SDL08-10 LED Surface-mounted Downlight are perfect choice for both new & replacement of PLC downlight


Features:

- Aluminium housing
- High performance optical firm diffuser
- High CRI (>80 or >90)
- High Power Factor (>0.9)
- Low THD Distortion
- Energy Efficiency
- Various dimming options

Standards:

- IEC/EN 60598-1, IEC/EN 60598-2-2
- IEC/EN 55015, IEC/EN 61547
- IEC/EN 61000-3-2, IEC/EN 61000-3-3
- RoHS Compliance

Dimension:

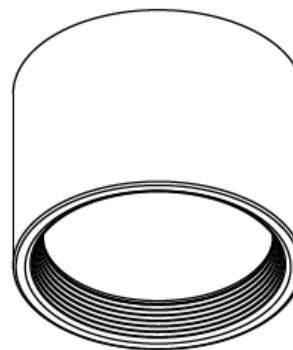

Dia. 200 x H130mm

Model:	EW-SDL08 Series		
Nominal Power:	30W		
Voltage:	200-240V AC 50/60Hz		
Color Temp:	3000k	4000k	5000k
Lumen Output	2700lm	2750lm	2800lm
Beam Angle:	90°		
Dimension:	Ø200mm x 130mm		
Dimming Options:	TRIAC / 0 - 10v Dimmable		
CRI:	> 80 or >90		
Emergency Battery Kit	2hrs/3hrs Ni-Cd Battery w/white Power Gear Box		
Life time:	35,000hours		