

Elwin - COB type LED recessed Spotlight

Series No: RS-608 Series



Features:


- Die-cast aluminium housing
- High performance optical firm diffuser
- High CRI (>80 or >90)
- High Power Factor (>0.9)
- High Lumen Efficiency (>85lm/w @ 80CRI)
- Long lifetime (>35,000hrs)
- **70% lumen maintenance after use of 35,000hrs**

- ◎ Minimal heat generation & high efficacy power transformer
- ◎ Excellent photometric performance
- ◎ Perfect Replacement alternative for **CDMT Spotlight**
- ◎ Emergency battery back up available


Standards:

- IEC/EN 60598-1, IEC/EN 60598-2-2
- IEC/EN 55015, IEC/EN 61547
- IEC/EN 62031:2008, IEC/EN 62471:2006
- RoHS compliant

Lighting Distribution :

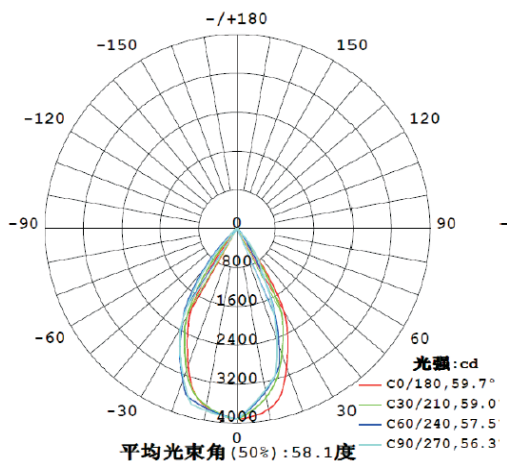

Dimension:

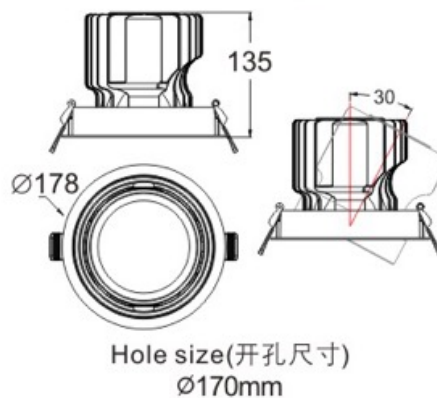

Detailed Specification:

Model:	RS-608		
Rated Power:	40w		50w
Voltage:	200-240V AC 50/60Hz		
Color Temp:	3000k	4000k	5000k
Lumen Output:	3400lm **4250lm	3600lm **4400lm	3800lm **4600lm
Beam Angle:	15° 20° 40° 60°		
Dimension:	Ø178mm x 135mm		
Cut-out:	Ø170mm		
Operation Temp:	-10 ~ 40°C		
CRI:	A type = >80 B type = >90		
Dimming Options:	TD = TRIAC Dimming AD = 0 - 10v Dimming		
Emergency Battery Kit	2hrs Ni-Cd Battery w/external Power Gear Box Model No.: WT400(LED) PGB Dimension: L430 x W150 x H50mm		
Life time:	40,000hrs		

** Lumen Output for 50w